

Pressure transducer for industrial application

S M L

Main features

- Measuring ranges -1...0 bar; 0...1 bar and to 0...1000 bar
- All standard signals for industry, hydraulics and pneumatics
- Temperature range of media -40°C to 125°C
- Shock and vibration resistance > 1000 g shock, > 20 g vibration
- No internal transmission media (fully welded, "dry" measuring cell)
- Protection class IP67 (special version up to IP69K)
- Compact and rugged model in stainless steel
- High flexibility for options thanks to modular design
- Plug systems MVS/A acc. to DIN EN 175301-803 A, MVS/C acc. to DIN EN 175301-803 E, M12
- Short delivery times

Applications

- generally to be used in industrial applications
- Hydraulics
- Pneumatics
- Engineering
- Industrial Equipment and Automation technology

Description

Thanks to its stainless steel membrane and to its semiconductor thin-film technology, the transducer has excellent properties that suggest its advantageous use in most industrial applications. Its robust design guarantees high reliability even in very rugged conditions. Its modular design permits cost-effective production, also in small batches, and offers a multitude of signal, thread and connecting options that can be supplied within very short time.



S M L

Pressure transducer for industrial application

Specifications

PRESSURE RANGE

Measuring range*	p [bar]	1,0	1,6	2,0	2,5	4,0	6,0	10,0	16,0
Overload pressure	p [bar]	6	6	6	10	10	20	20	40
Burst pressure	p [bar]	9	9	9	15	15	30	30	60
Measuring range*	p [bar]	20	25	40	60	100	160	200	
Overload pressure	p [bar]	40	100	100	200	200	400	400	
Burst pressure	p [bar]	60	150	150	300	300	600	600	
Measuring range*	p [bar]	250	400	600	1000				
Overload pressure	p [bar]	750	750	840	1200	(vacuum, relative pressure, +-, absolute pressure are available)			
Burst pressure	p [bar]	1000	1000	1050	1500				

ELECTRICAL PARAMETER

		signal		U_s [V _{DC}]	R_i [k Ω]	R_A [Ω]
Output signal* and maximum acceptable burden R_A	R_A in Ohm	4...20 mA (2-wire, 3-wire)		9...32		acc. to $R_A = < (U_s - 10V) / 0,02 A$
		0...10 V _{DC} (3-wire)		12...32	> 5,0	
		0...5 V _{DC}		8...32	> 2,5	
		1...5 V _{DC}		8...32	> 2,5	
		0,5...4,5 V _{DC} ratiometric		5 \pm 10%	> 4,7	
Response time* (10...90%)	t [ms]	< 1				
Withstand voltage	U [V _{DC}]	350	option 710			

ACCURACY

Accuracy @ RT	% of the range $\leq 0,50^{**}$	option $\leq 0,25$	** incl. nonlinearity, hysteresis, repeatability, zero-offset- and final-offset (acc. to IEC 61298-2)		
	BFSL $\leq 0,125$				
Non-linearity	% of the range $\leq 0,15$				
Repeatability	% of the range $\leq 0,10$				
Stability/year	% of the range $\leq 0,10$				

ACCEPTABLE TEMPERATURE RANGES

Measuring medium	T [°C]	-40...125		
Ambience	T [°C]	-40...105	(option -55)	
Storage	T [°C]	-40...125		
Compensated range*	T [°C]	-20...85		
Temperature coefficient within the compensated range				
Mean TC offset	% of the range $\leq 0,15 / 10K$			
Mean TC range	% of the range $\leq 0,15 / 10K$			
Total error	% of the range -40°C 2,00%			
	% of the range 105°C 2,00%			

MECHANICAL PARAMETER

Parts in contact with the measuring medium*	stainless steel			
Housing*	stainless steel			
Shock resistance	g	1000	acc. to IEC 68-2-32	
Vibration resistance	g	20	acc. to IEC 68-2-6 und IEC 68-2-36	
Mass	m [g]	80-120	depending on design	
CE - conformity	EC Directive 89/336/EWG			
IP system of protection	The IP system of protection as specified in the data sheets generally applies, with their mating plug connected. Relative pressure transmitters usually require a ventilated mating plug and/or cable to allow for pressure compensation. From a pressure range of 60bar, a ventilated mating plug and/or cable is not necessarily required.			

* others upon request

Pressure transducer for industrial application

S M L

Configurations -examples-

SML (MVS/C Conn.)




MVS/A



MVS/C



M12x1
(S763)

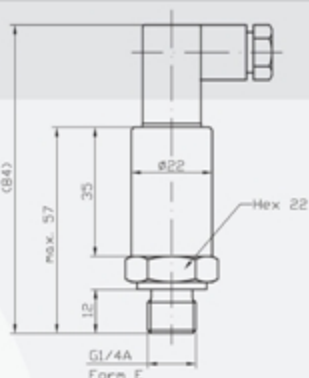


(deviations for absolute pressure are possible)

Connectors*

male socket
M12x1
(S763)



cable output



MVS/A
DIN EN 175301-803




MVS/C
DIN EN 175301-803




Pressure Connections*


G 1/4 A; DIN 3852; Form E




G 1/4 B



G 1/2 B



1/4 NPT





* custom-made adjustments acc. to pressure connections and connecting options are possible

S M L



Pressure transducer for industrial application

Electrical Connections* (left: 2-wire, right: 3-wire)



MVS/A,
DIN EN
175301-803





MVS/C,
DIN EN
175301-803



male
socket
M12x1
(S 763)



cable
output



Legend

- power supply
- consumer

- red
- black
- white