

## Power Supplies

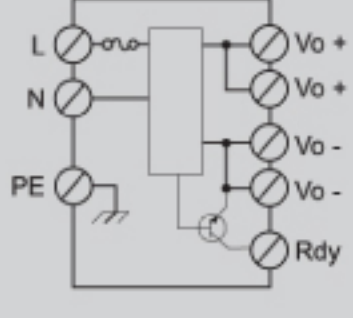
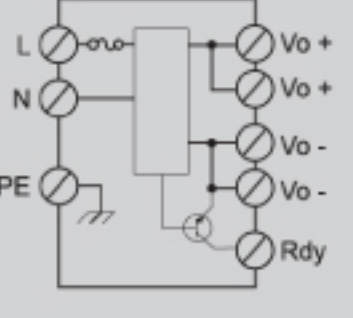
Single-phase input voltage  
1.25 A, 2.5 A



5,550.-



3,370.-

	1.25 A	2.5 A																				
	30 W	60 W																				
	24 V DC (SELV)	24 V DC (SELV)																				
	100...240 V AC	100...240 V AC																				
<b>Model (โมเดล)</b>	<b>BAE PS-XA-1W-24-012-002</b>	<b>BAE PS-XA-1W-24-025-002</b>																				
	85...264 V AC/90...375 V DC	85...264 V AC/90...375 V DC																				
	115 V AC < 20 A/230 V AC < 40 A	115 V AC < 30 A/230 V AC < 60 A																				
	47...63 Hz	47...63 Hz																				
	T2 A/250 V AC internal	T2 A/250 V AC internal																				
	24.0...28.0 V DC	24.0...28.0 V DC																				
	±0.03 %/°C	±0.03 %/°C																				
	50 mV	50 mV																				
	115 V AC > 20 ms/230 V AC > 30 ms	115 V AC > 20 ms/230 V AC > 30 ms																				
	Green LED	Green LED																				
	86 %	89 %																				
	Forward characteristic	Forward characteristic																				
	> 80 kHz	> 55 kHz																				
	3000 V AC	3000 V AC																				
	100 MΩ	100 MΩ																				
	< 1 s	< 1 s																				
	-25...+71° C	-25...+71° C																				
	-2.5 %/°C above +61 °C	-2.5 %/°C above +61 °C																				
	Yes (with external diodes)	Yes (with external diodes)																				
	IP 20	IP 20																				
	DC OK output	DC OK output																				
	Air convection	Air convection																				
	Plastic	Plastic																				
	0.29 kg	0.36 kg																				
	CE, UL/cUL, TÜV	CE, UL/cUL, TÜV																				
	 <table border="1"> <tbody> <tr> <td>L, N</td> <td>Input terminals</td> </tr> <tr> <td>PE</td> <td>PE connection</td> </tr> <tr> <td>Vo -</td> <td>Output terminal -</td> </tr> <tr> <td>Vo +</td> <td>Output terminal +</td> </tr> <tr> <td>Rdy</td> <td>Ready output</td> </tr> </tbody> </table>	L, N	Input terminals	PE	PE connection	Vo -	Output terminal -	Vo +	Output terminal +	Rdy	Ready output	 <table border="1"> <tbody> <tr> <td>L, N</td> <td>Input terminals</td> </tr> <tr> <td>PE</td> <td>PE connection</td> </tr> <tr> <td>Vo -</td> <td>Output terminal -</td> </tr> <tr> <td>Vo +</td> <td>Output terminal +</td> </tr> <tr> <td>Rdy</td> <td>Ready output</td> </tr> </tbody> </table>	L, N	Input terminals	PE	PE connection	Vo -	Output terminal -	Vo +	Output terminal +	Rdy	Ready output
L, N	Input terminals																					
PE	PE connection																					
Vo -	Output terminal -																					
Vo +	Output terminal +																					
Rdy	Ready output																					
L, N	Input terminals																					
PE	PE connection																					
Vo -	Output terminal -																					
Vo +	Output terminal +																					
Rdy	Ready output																					

